


SeekdaPay Terminal M400 installation guide

 This is a step by step installation guide for the payment terminal M400

When your parcel arrives, this will look like the following, including a “packing list” with all items which are packed:



Unbox the parcel:




You will find all items as mentioned on the packing list:

- Power cord three point EU
- M400 terminal device
- CUBE Ethernet - M400
- Power supply - M400/MX-Series





unwrap all items from plastic and cable holder

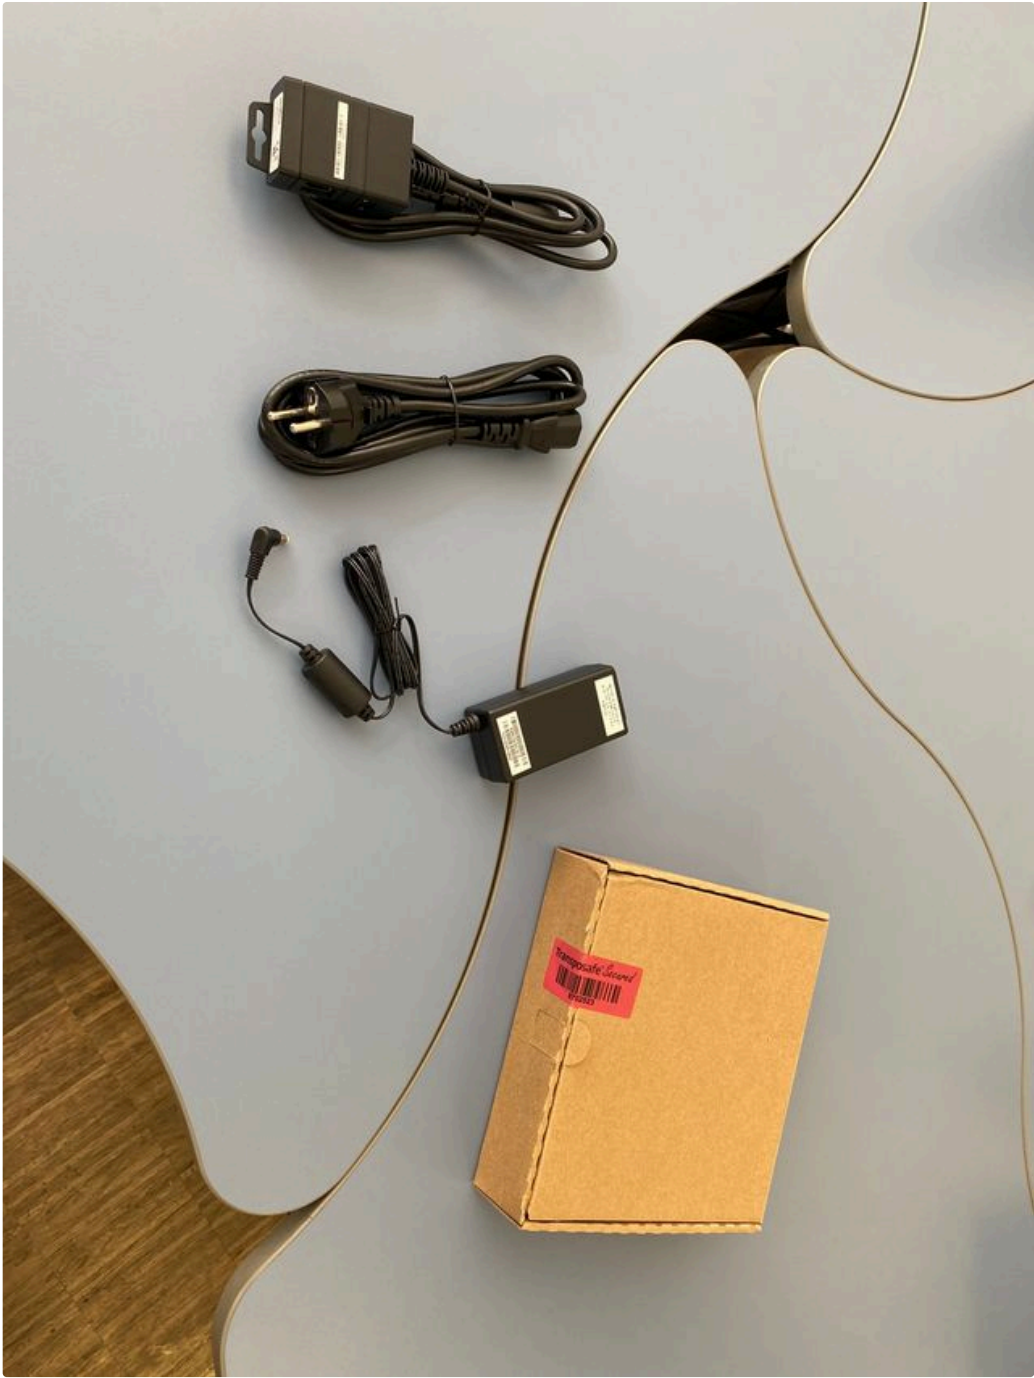




Transposafe Secured
33232078



at the terminal - you will find a quick installation guide to follow



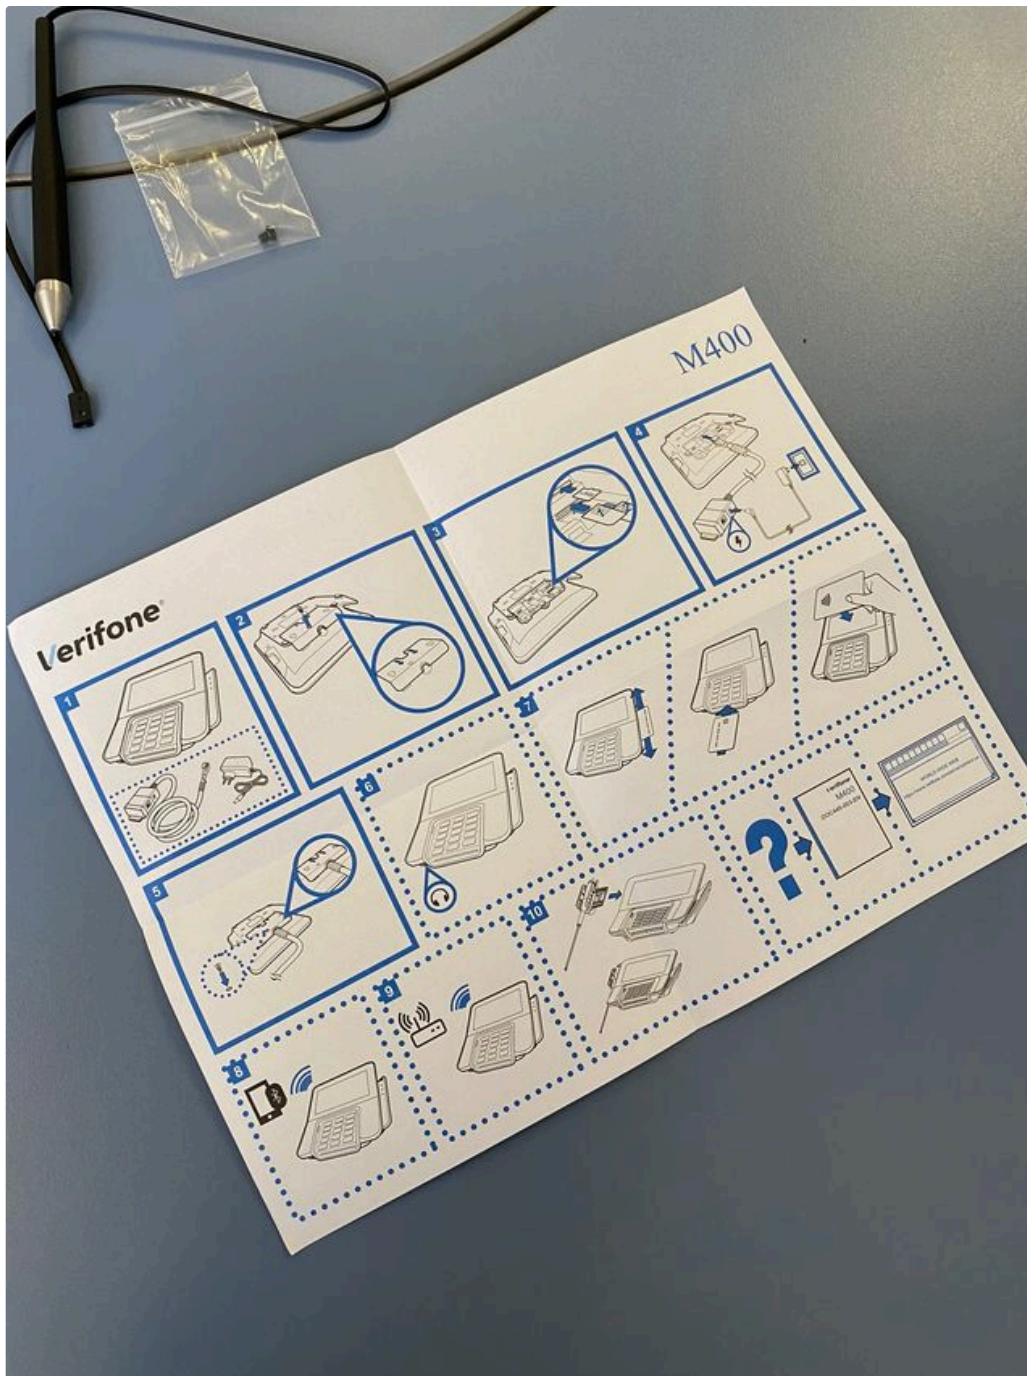

remove the plastic cover on the back of the terminal



plugin the cable es described in the installation guide






attach the plastic cover



you will need a screwdriver for mounting the plastic cover with the provided screw



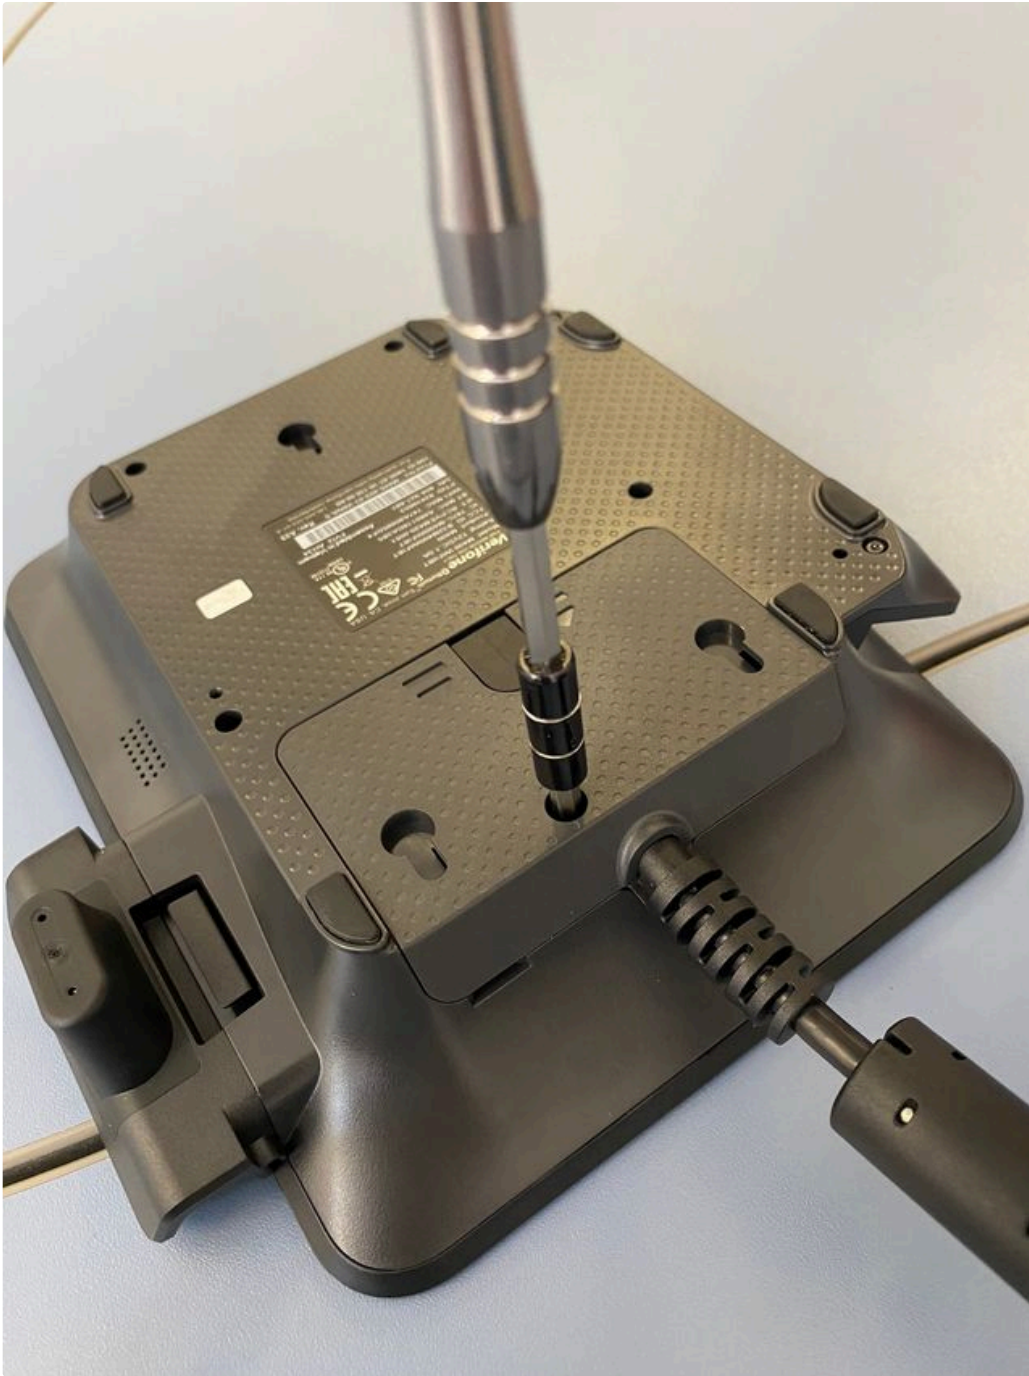


plug in all connectors to the power supply





for mounting the pen, you need to remove the device on the side first, and put in the bracket

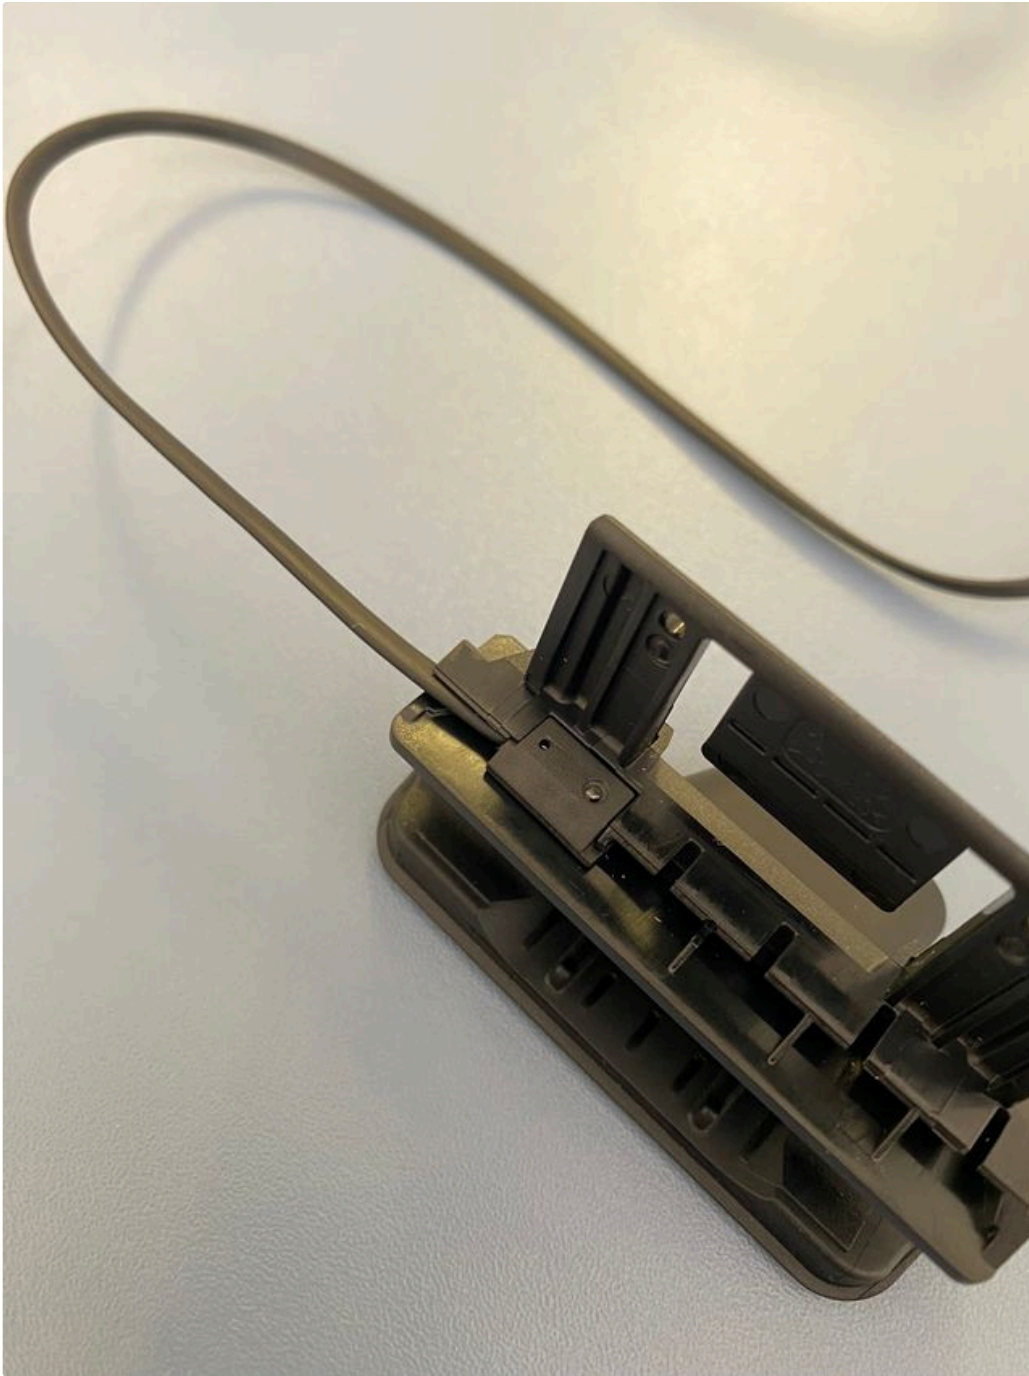


then put it back on the side of the terminal




now plug the power adapter into the socket, the device boots up




after some seconds (up to one minute) the device shows a loading symbol

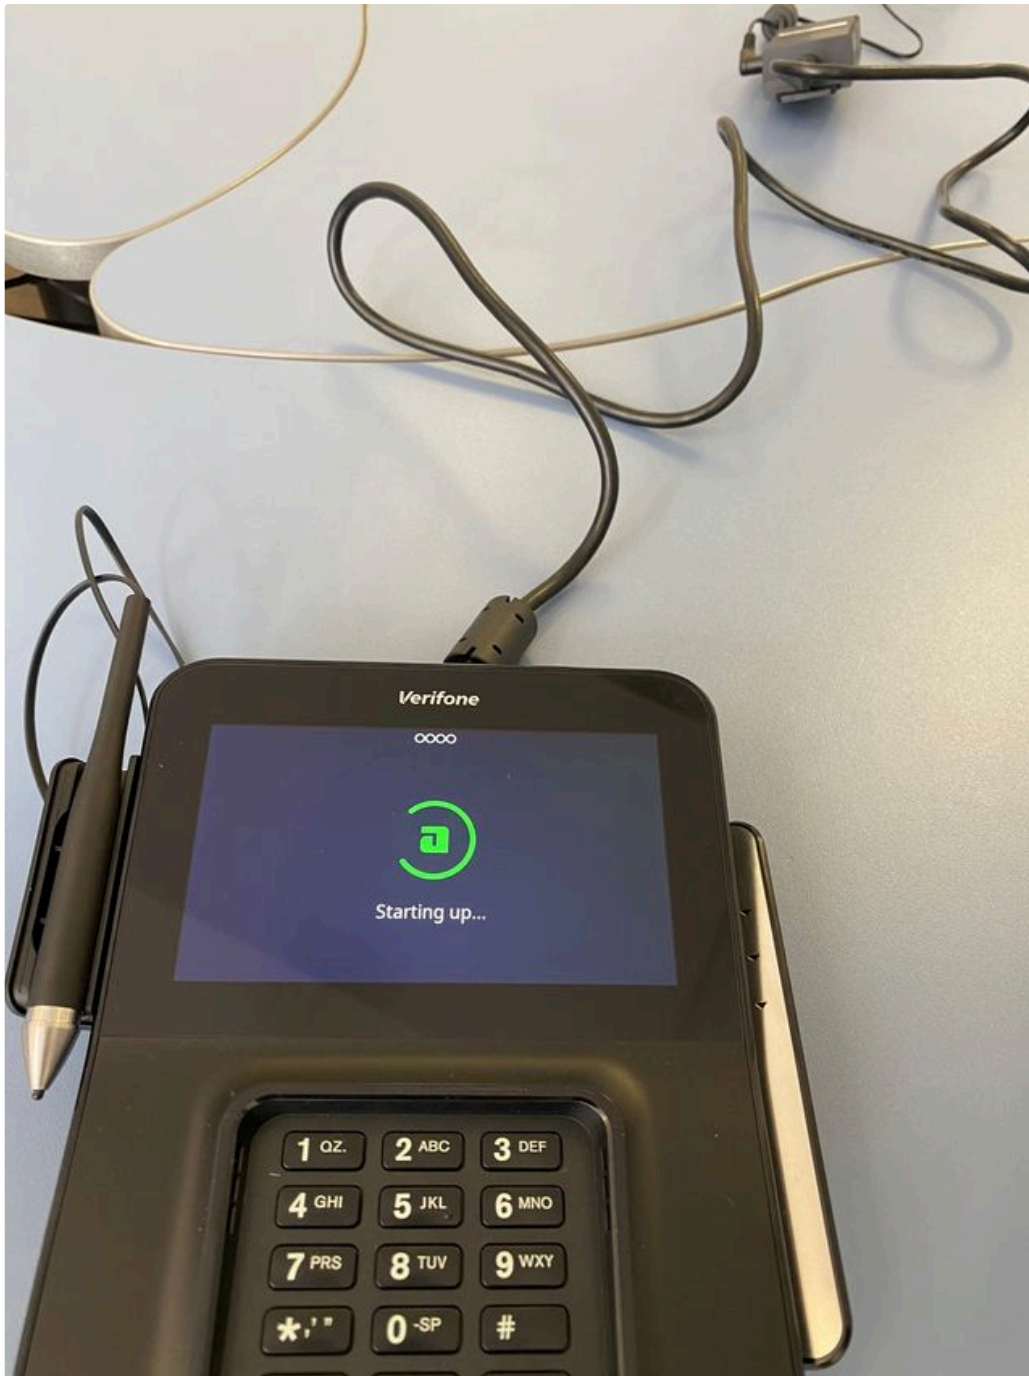


after the booting process, you will be prompted to set up the network

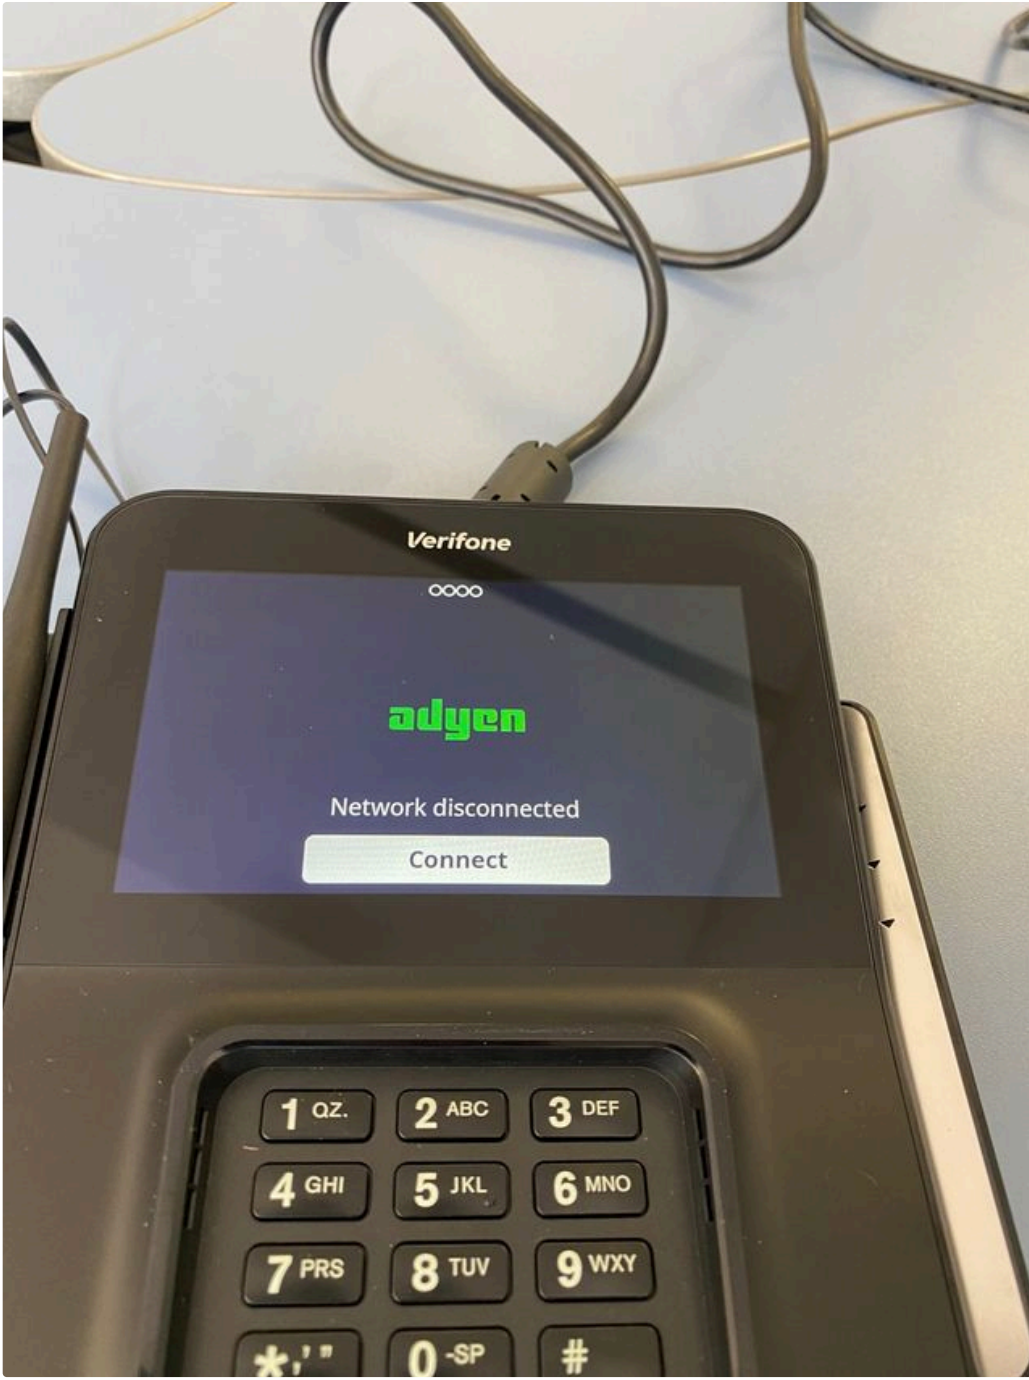


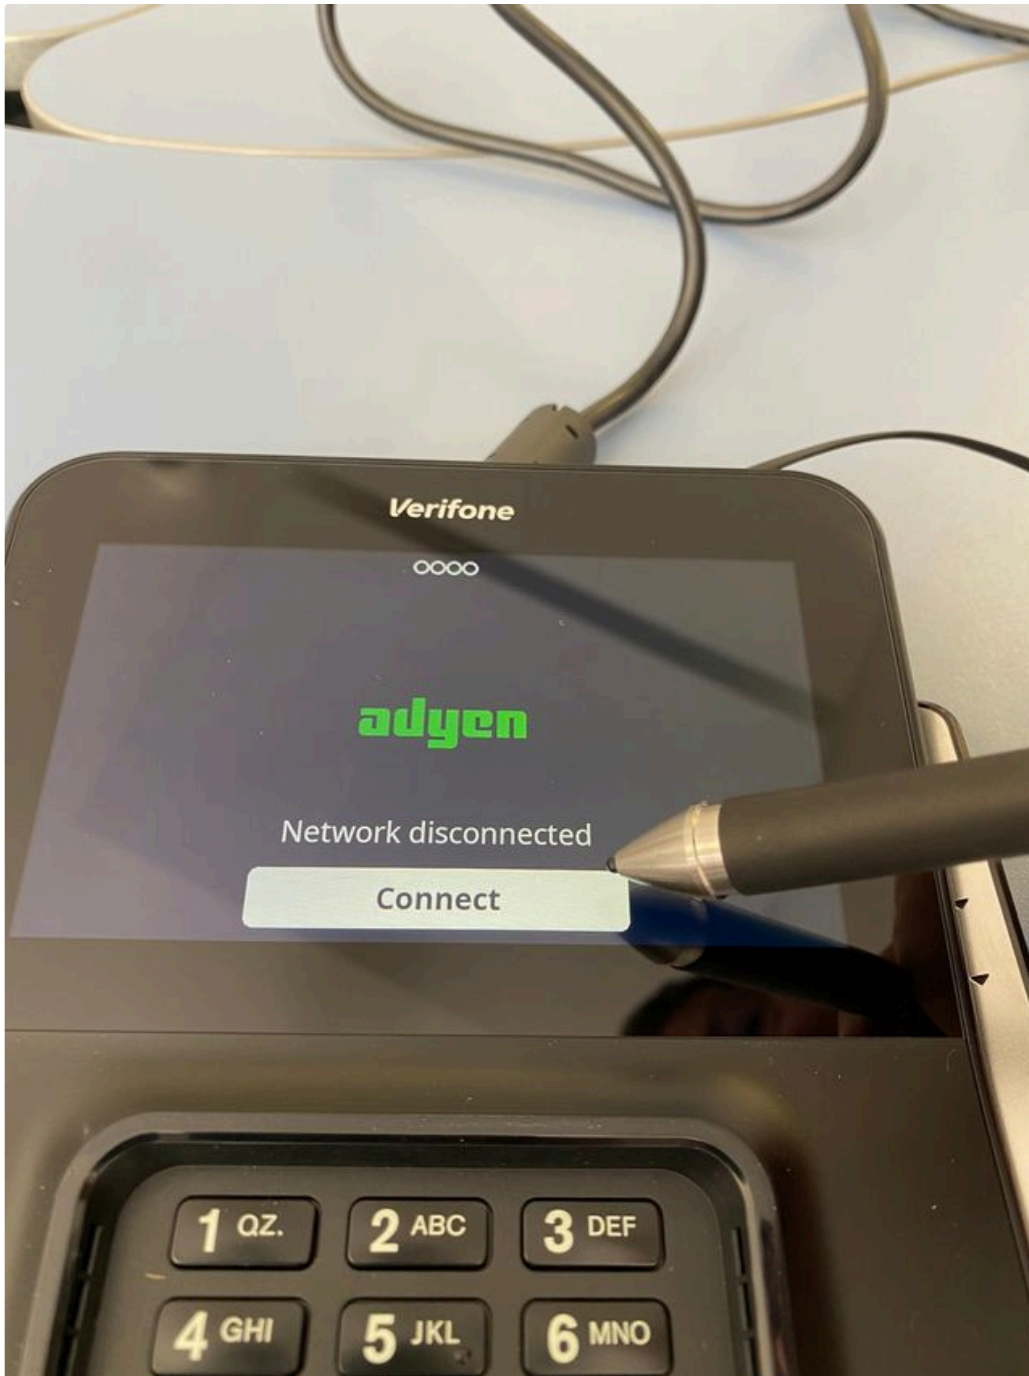

you can choose between ethernet (please note, no ethernet cable is provided with the terminal), or Wi-Fi

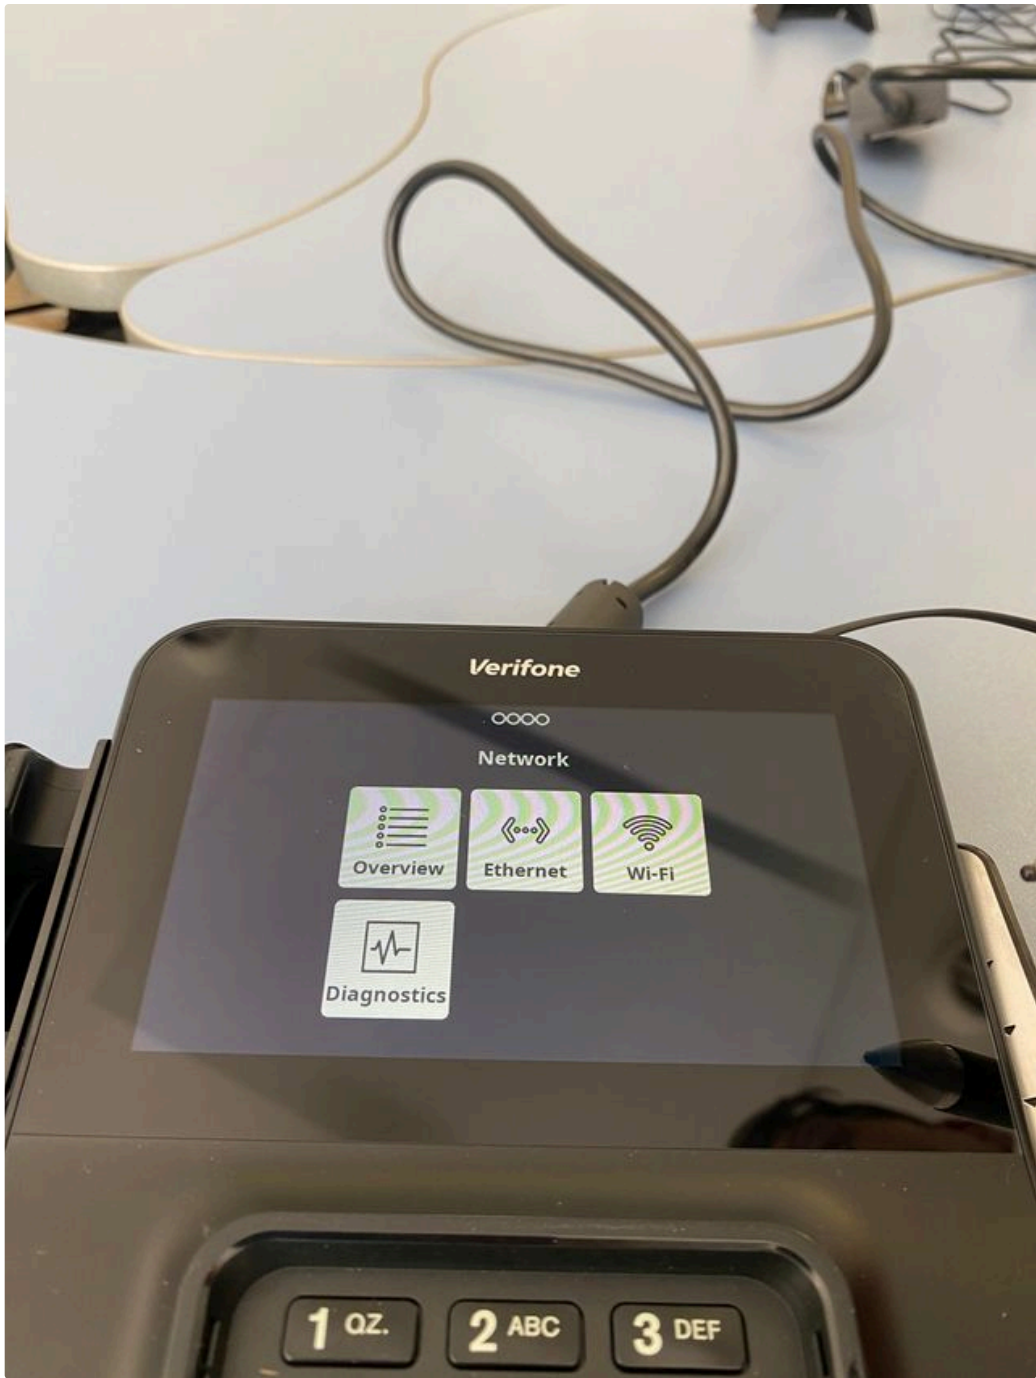

choose Wi-Fi and activate the Wi-Fi

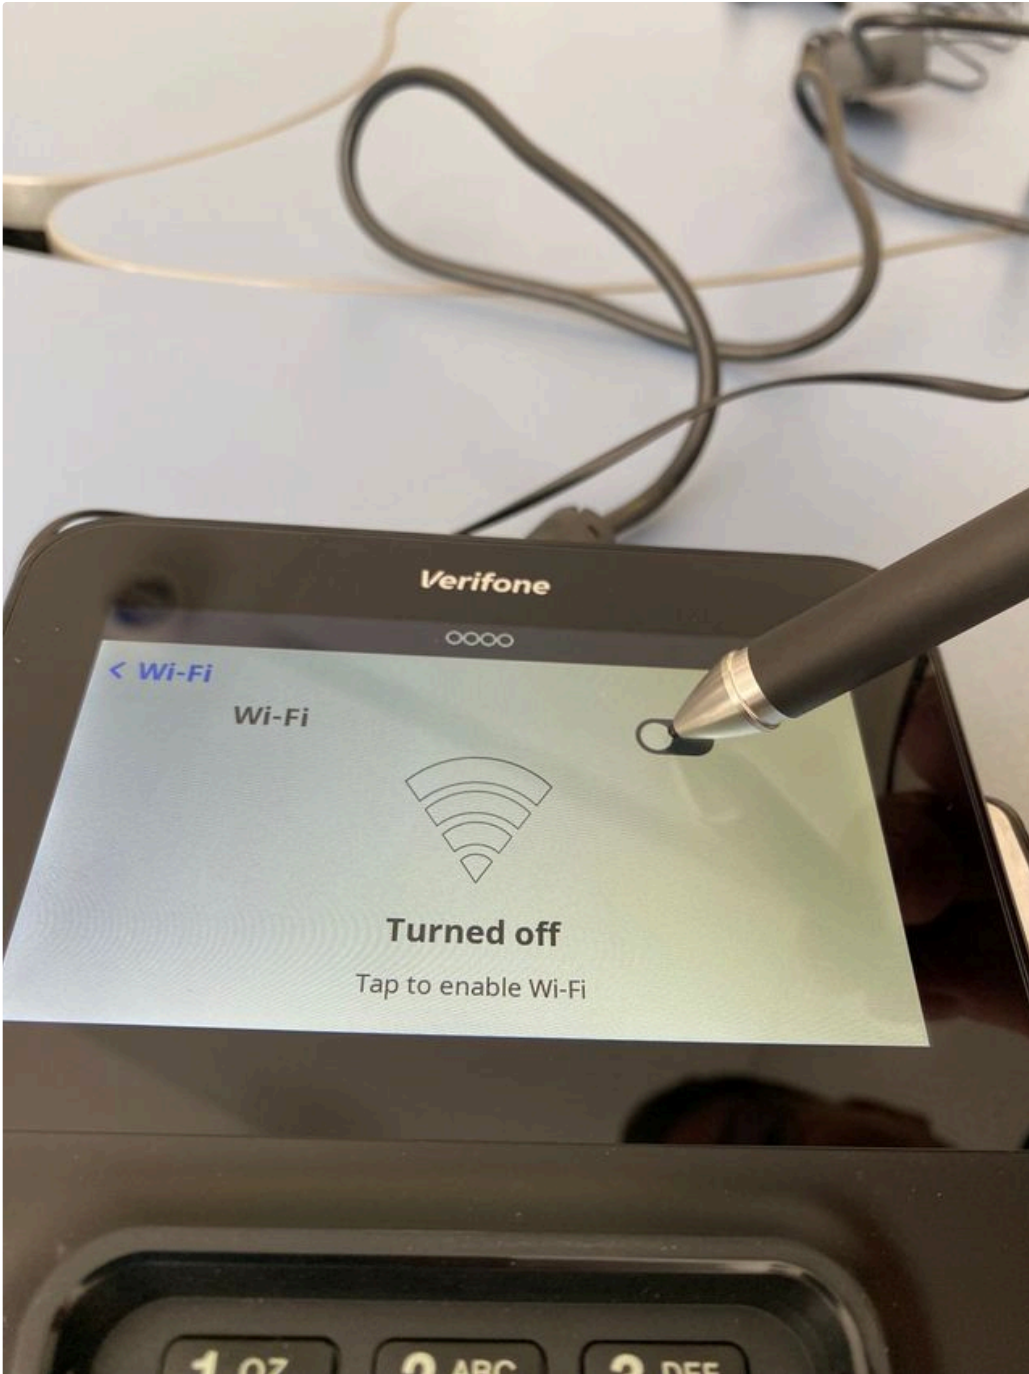

Verifone

○○○○

< Wi-Fi

Wi-Fi




Turned off

Tap to enable Wi-Fi

1 07

2 ABC

3 DEF

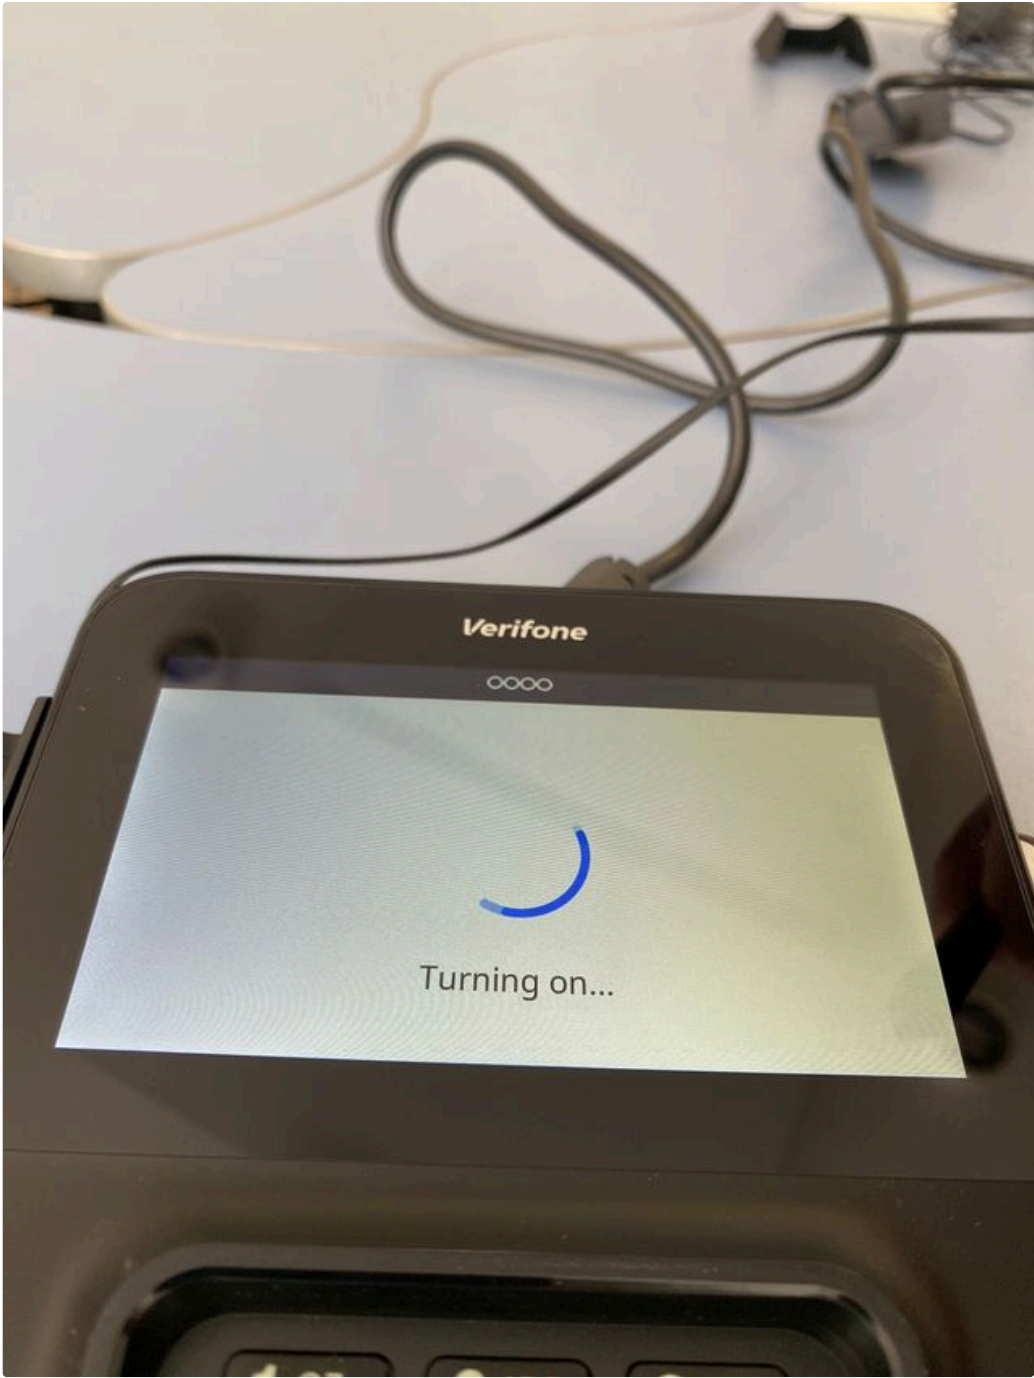


Verifone


oooo




Turning on...

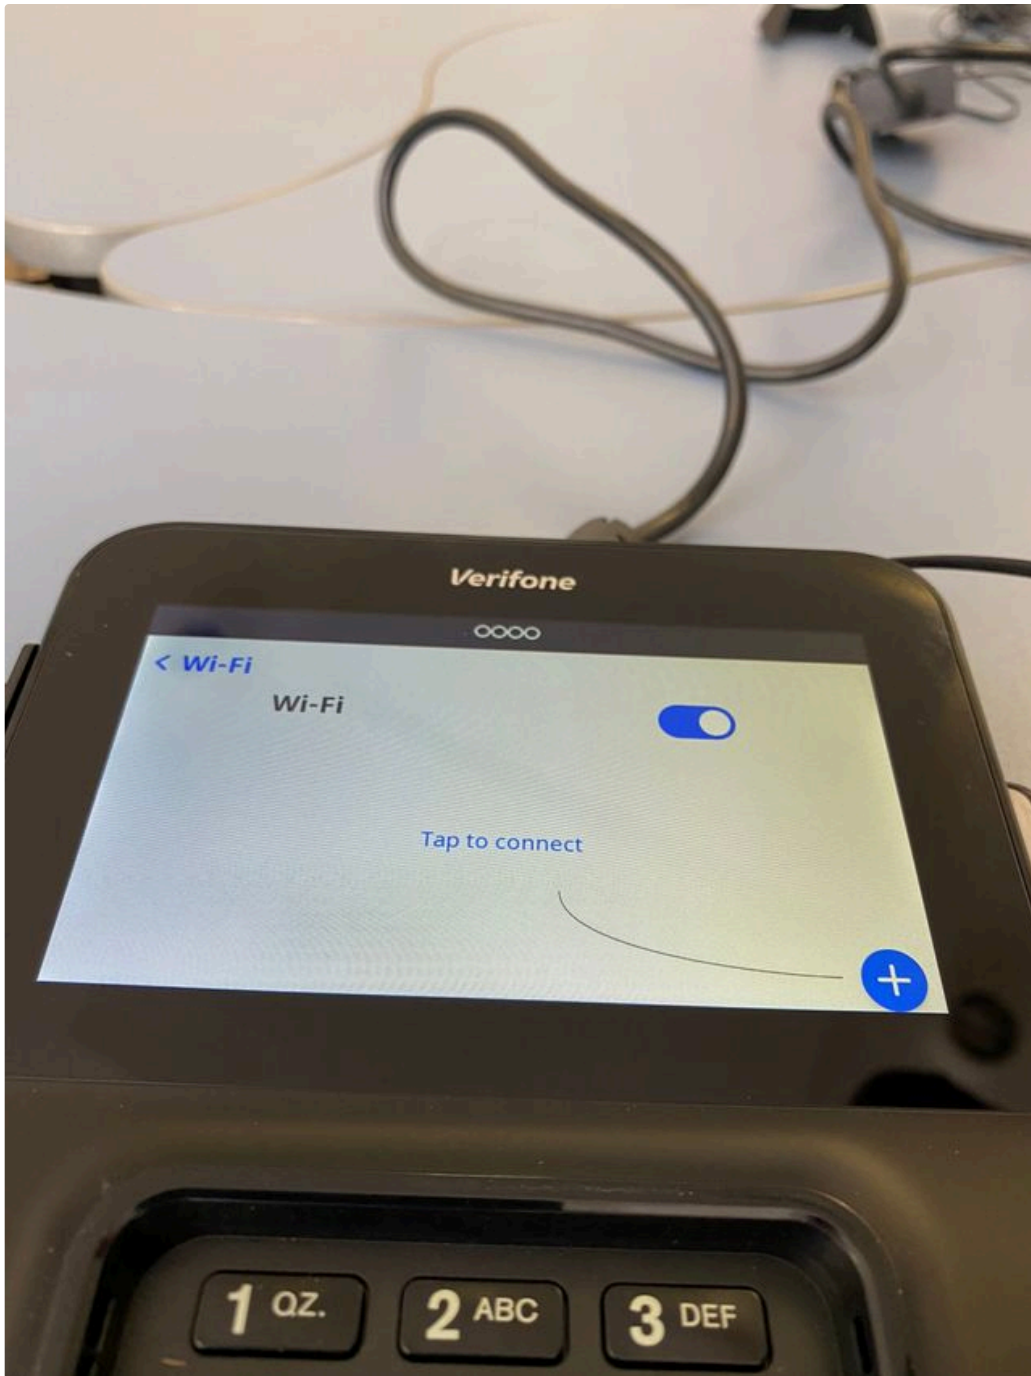

choose the plus button and proceed with the shown Wi-Fi you like to connect to

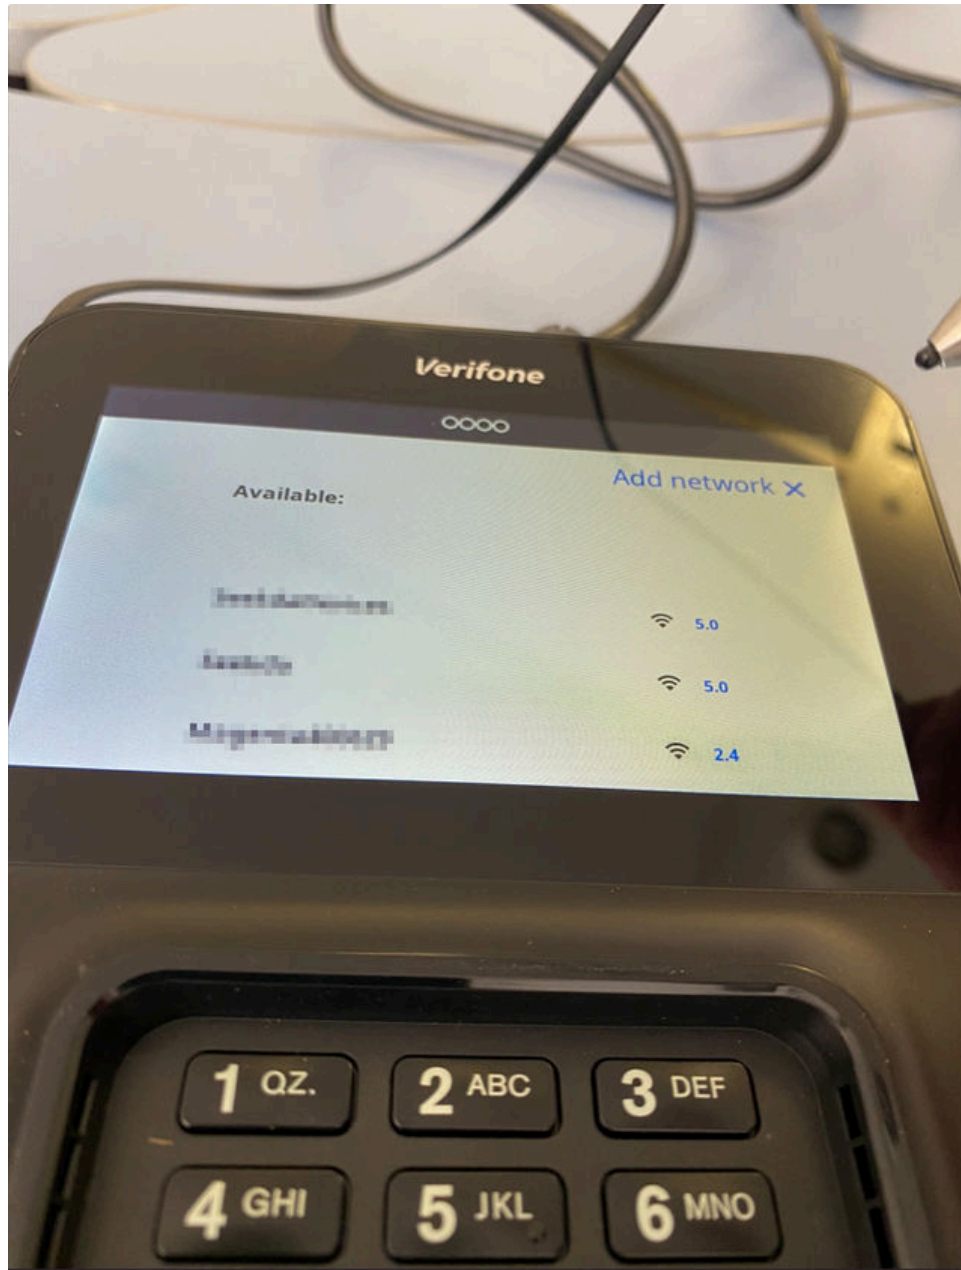

enter the password for your desired Wi-Fi network

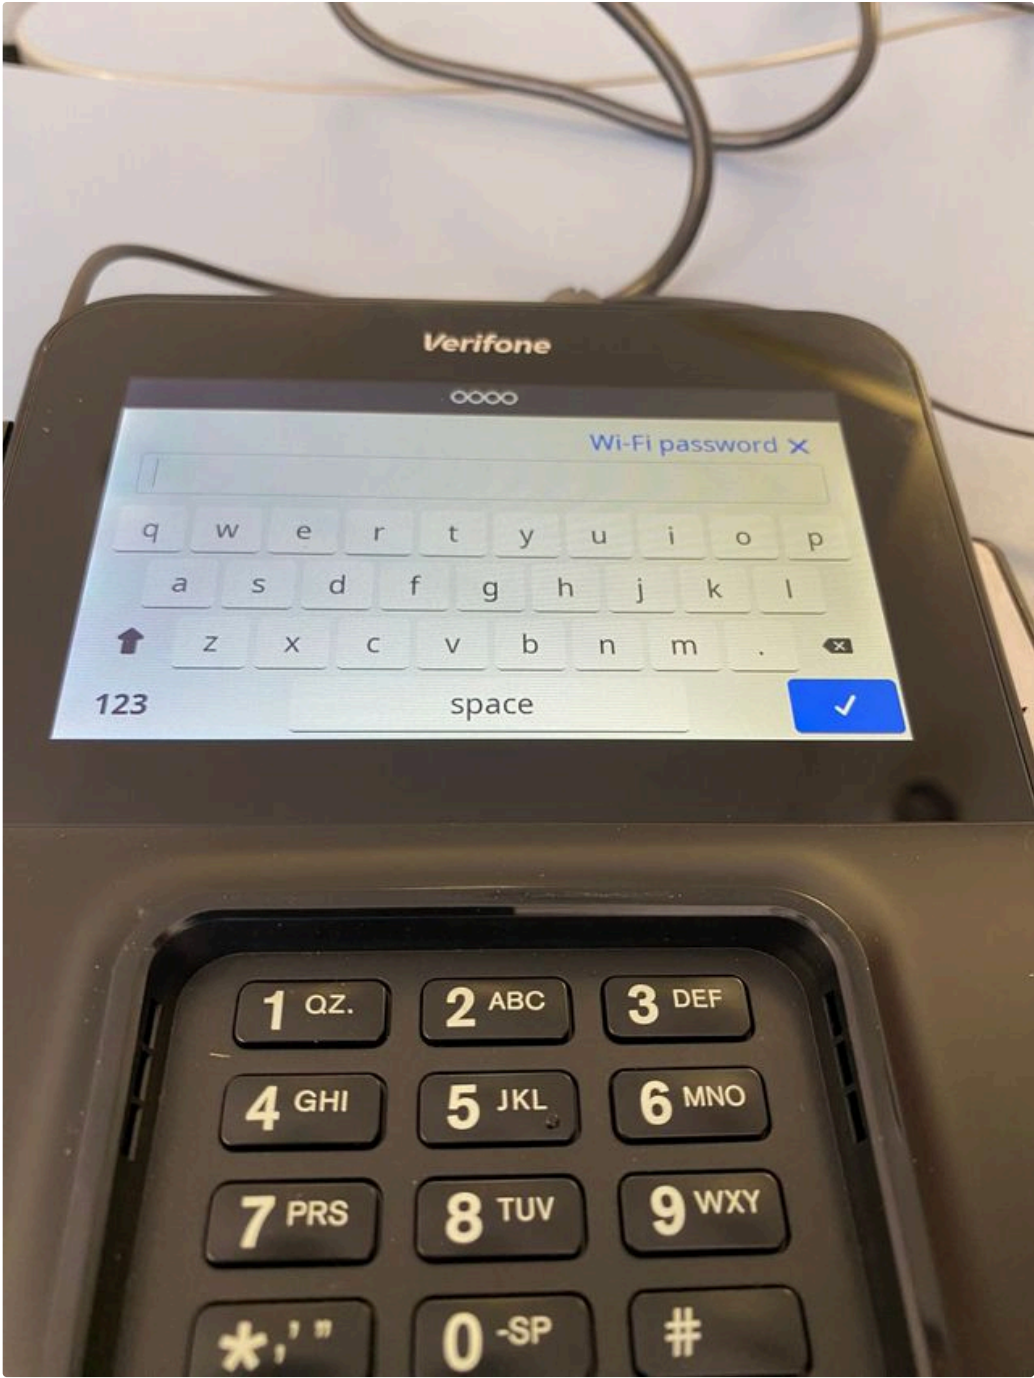

Verifone

0000

Wi-Fi password X

q w e r t y u i o p
a s d f g h j k l
↑ z x c v b n m .

123

space



1 QZ.

2 ABC

3 DEF

4 GHI

5 JKL

6 MNO

7 PRS


8 TUV

9 WXY


*,'"

0 -SP


#

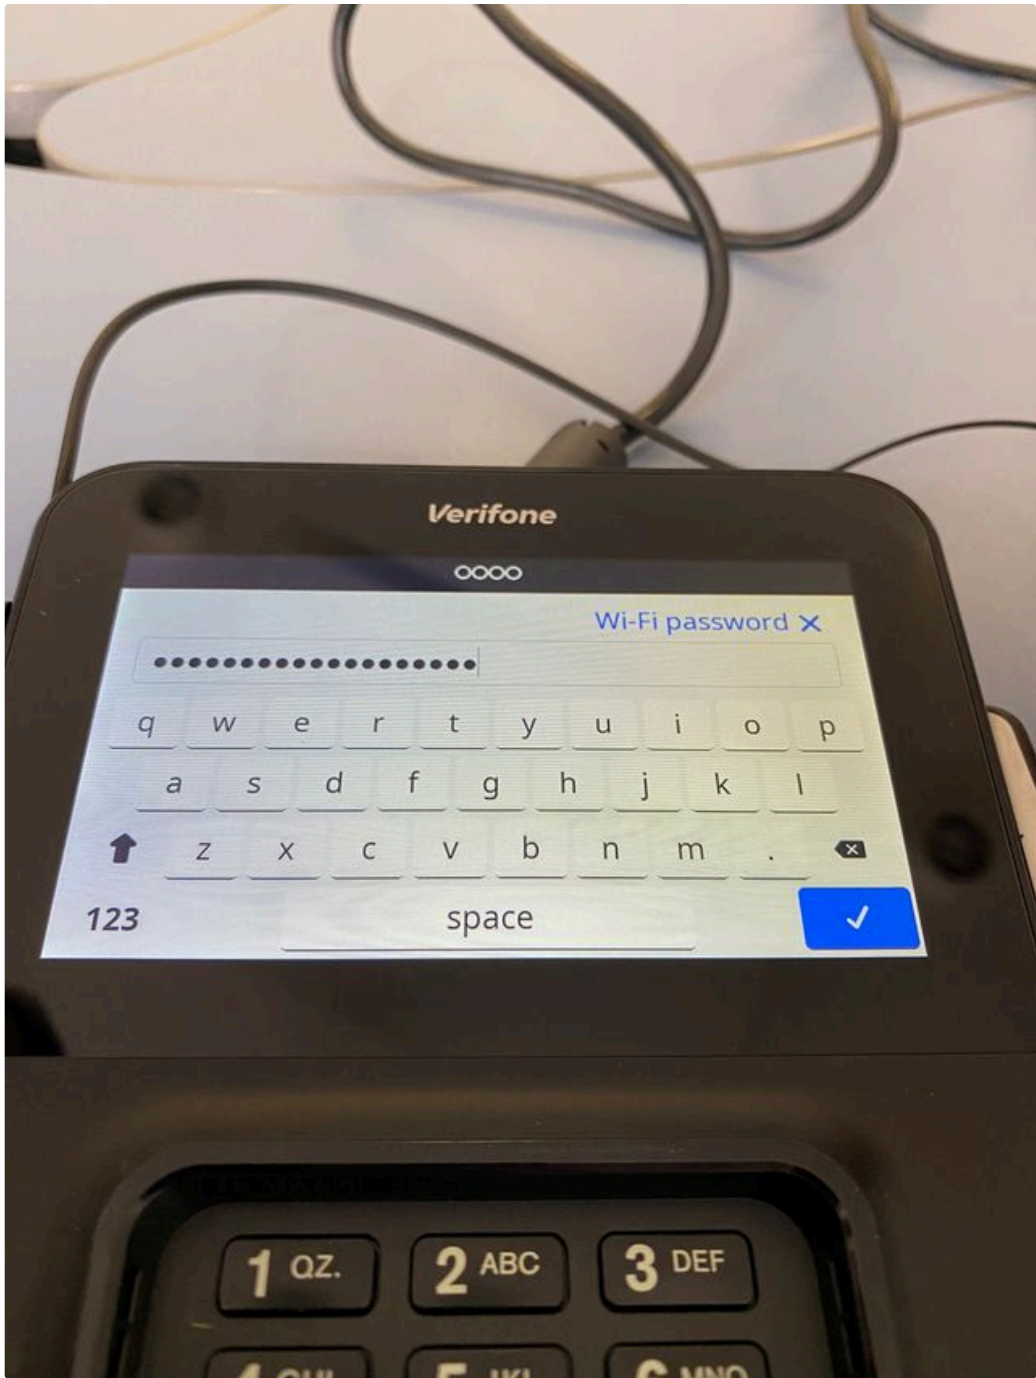


tap the blue hook to confirm

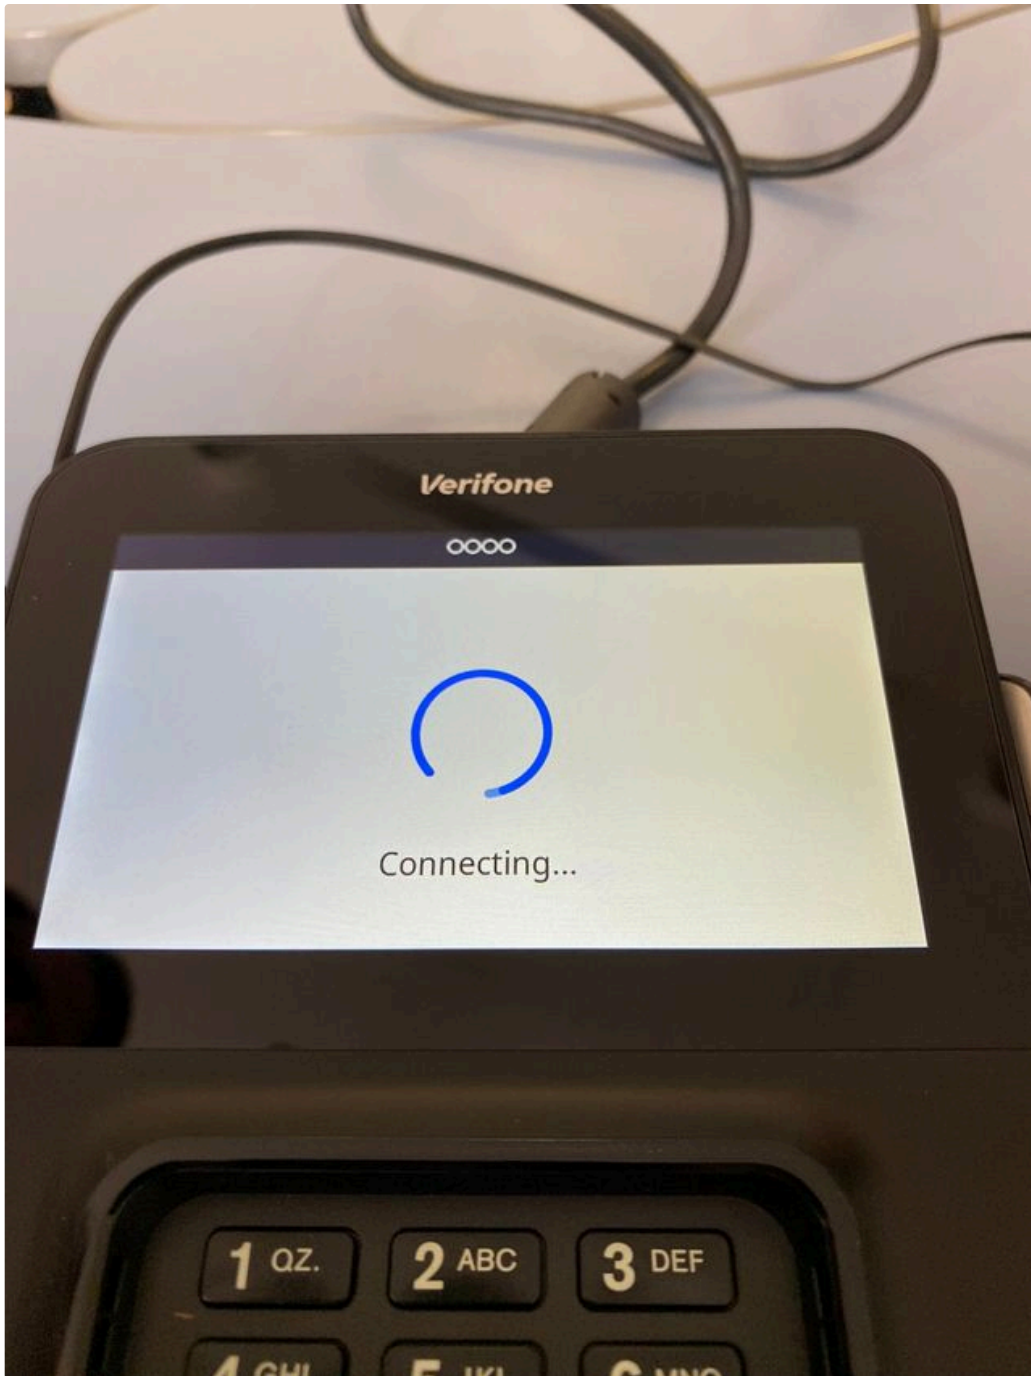


now go back by tapping on the upper left arrow

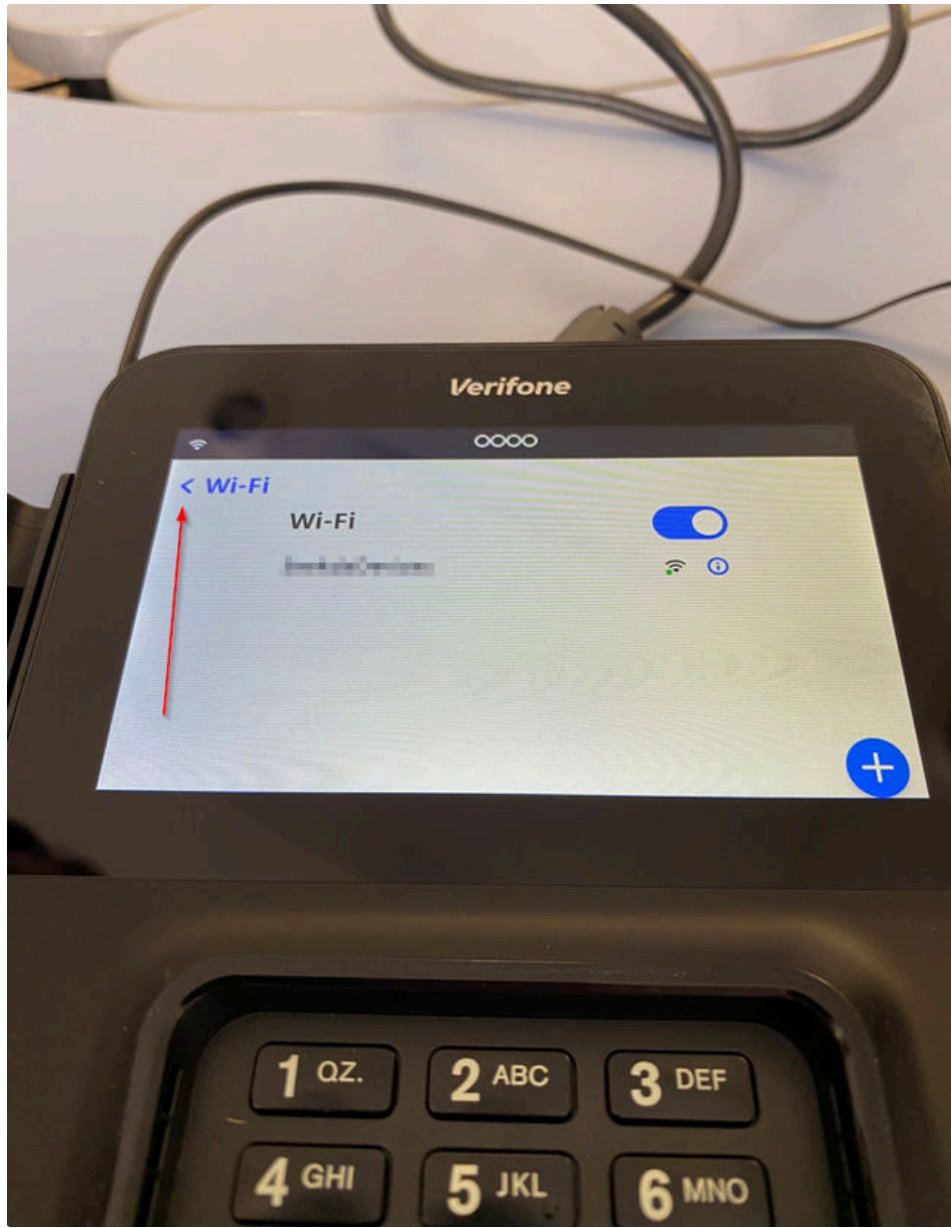


you will now see following screen

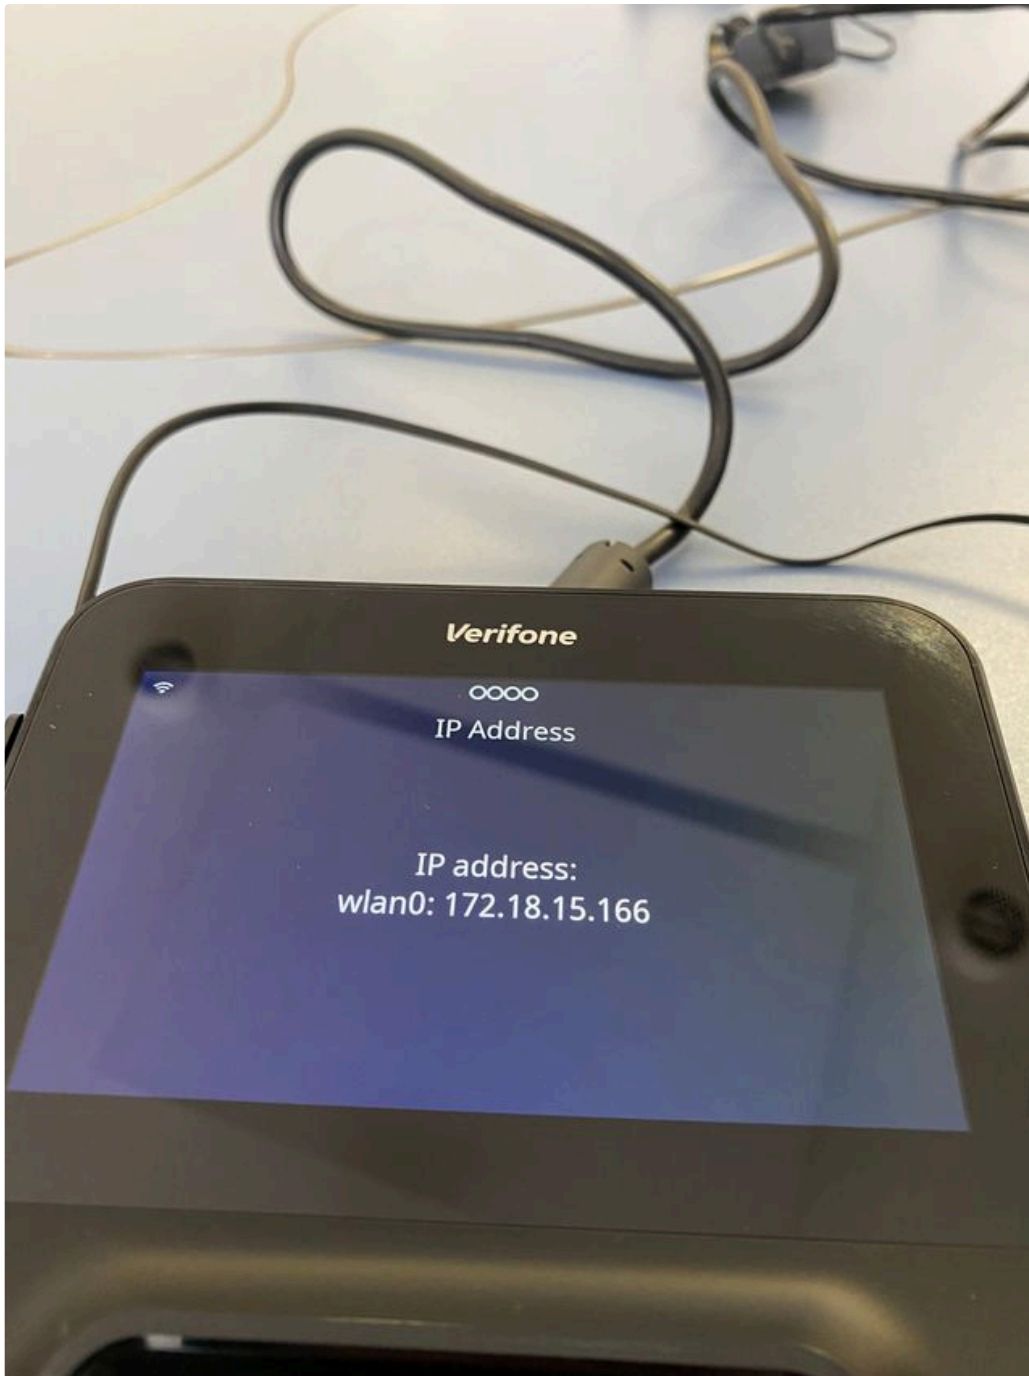

after some seconds you see the screen to board your terminal

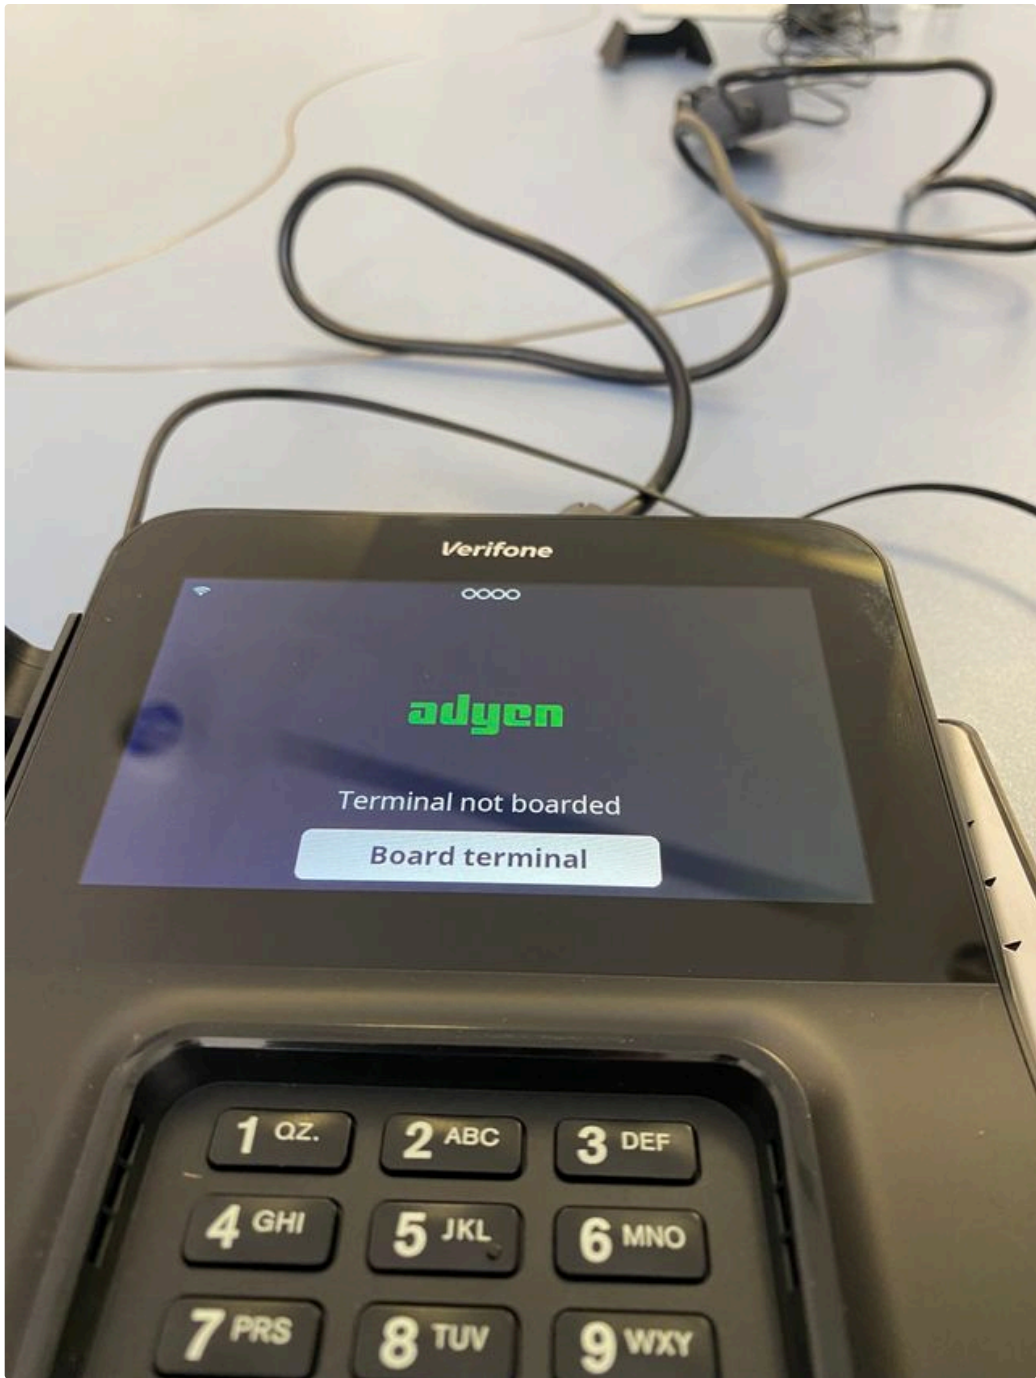

tap on board terminal

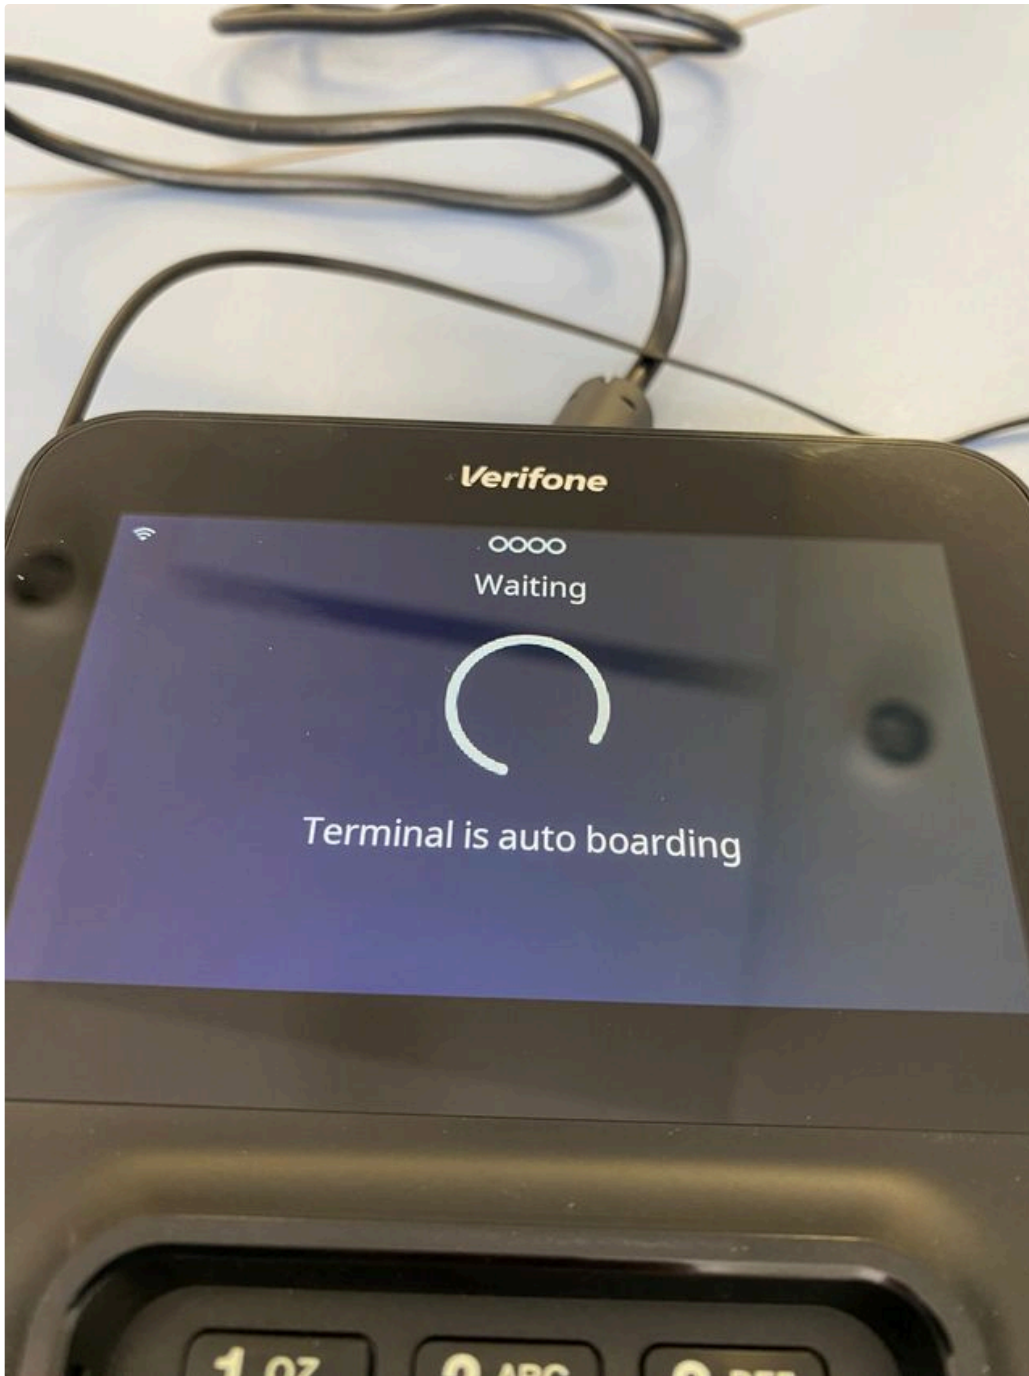

choose your location and confirm

Verifone

0000

Store location




Wien


10/15 Neubaugasse

d9db1ad6-cef9-433e-b3f8-dd5329f5b9ca


Confirm

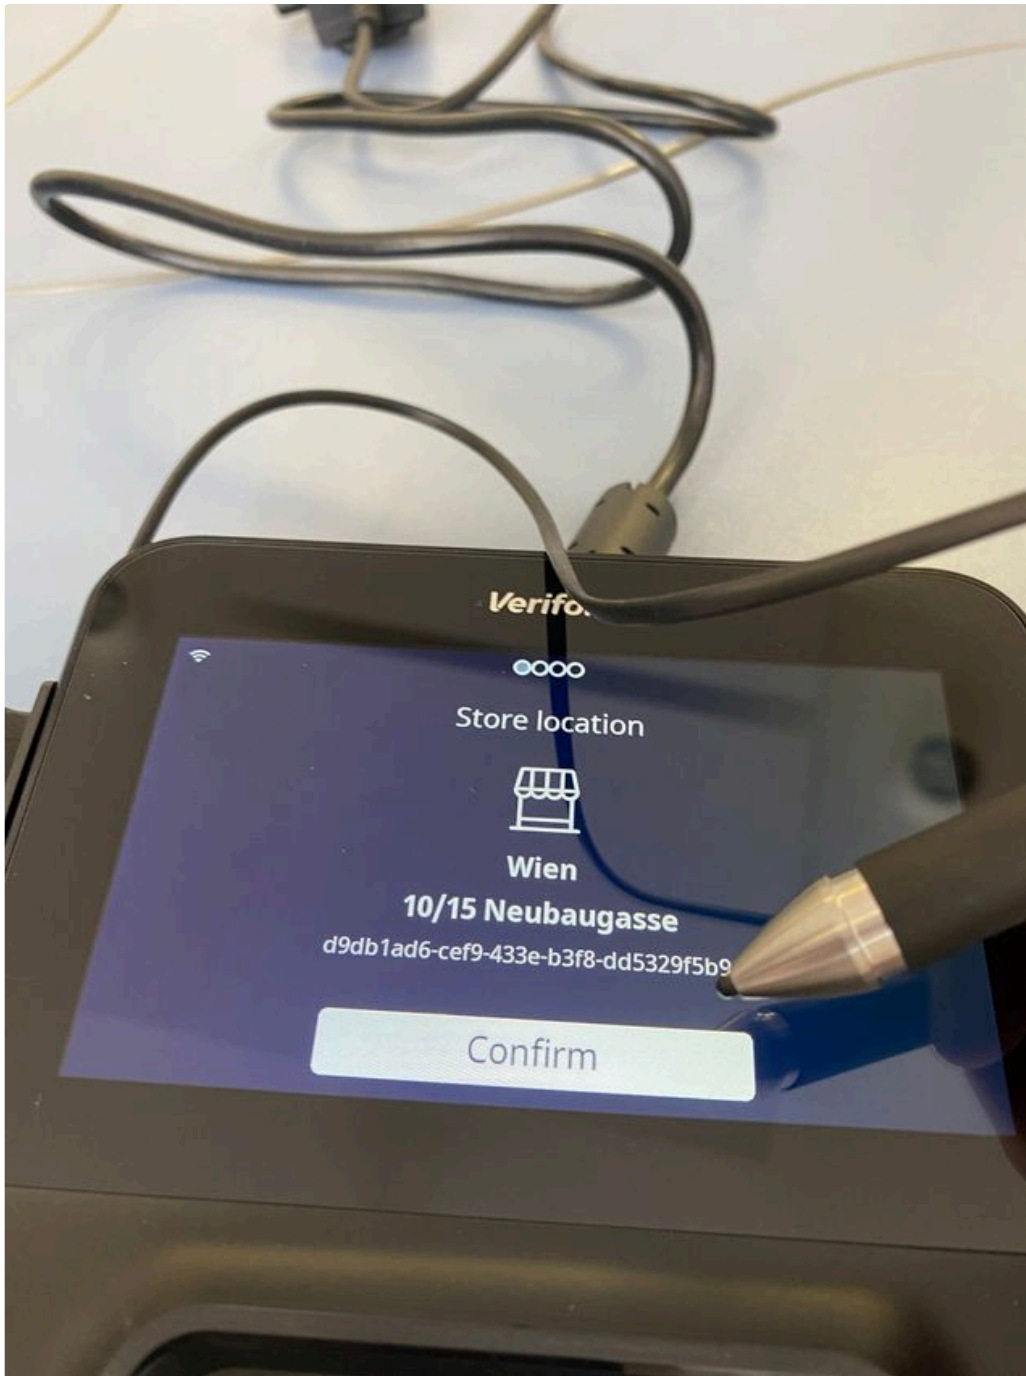

you will now see 2 loading screens and the device will restart

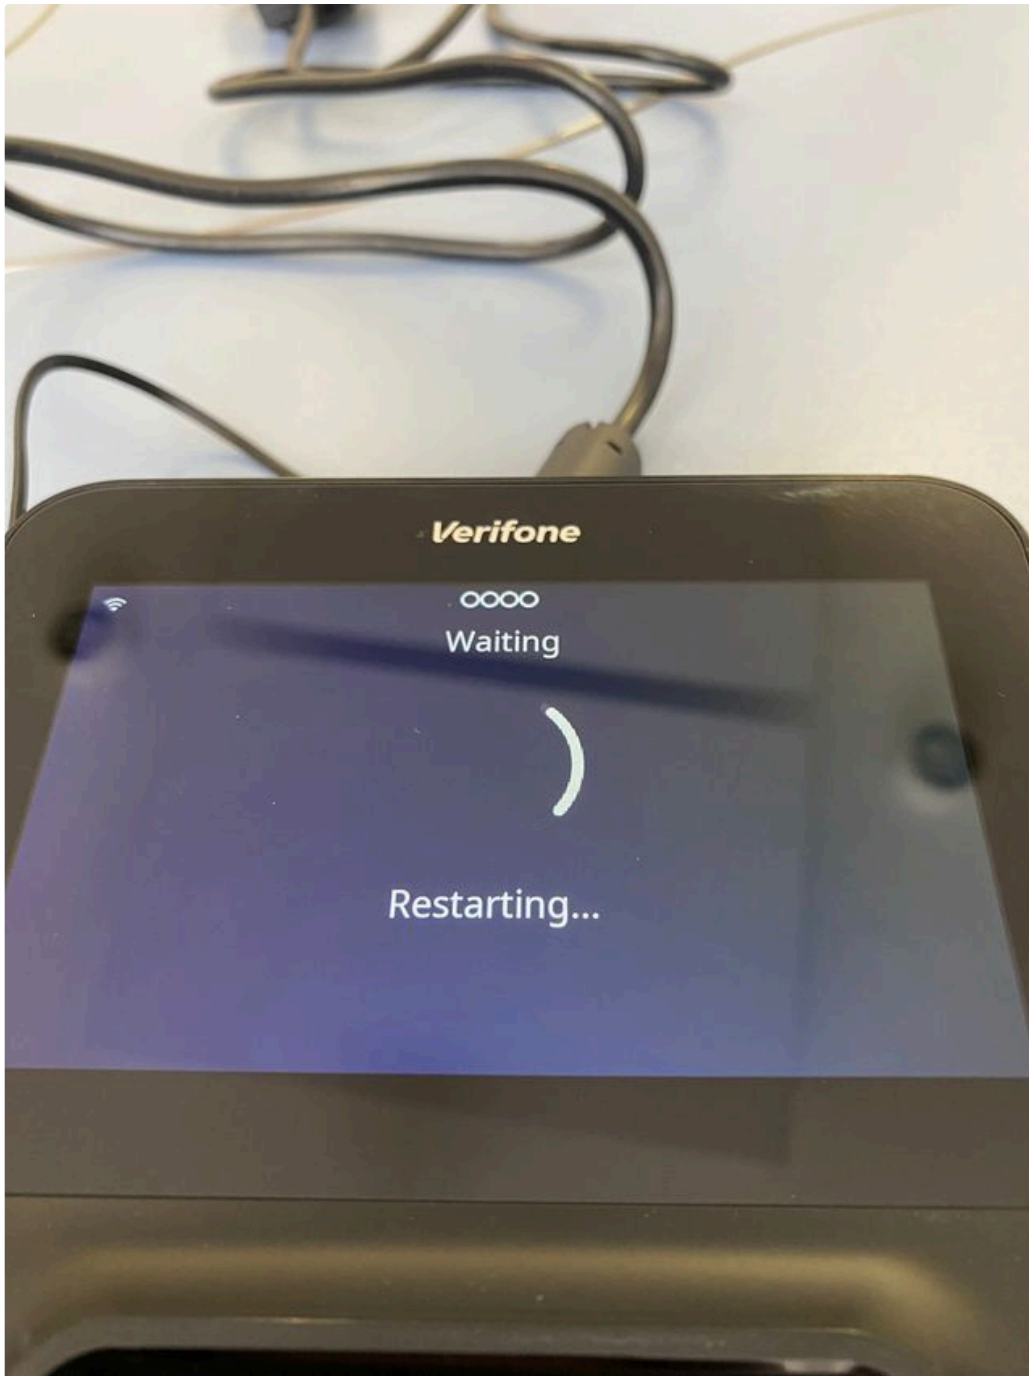


the screen will change to German now, and states "Hochfahren"

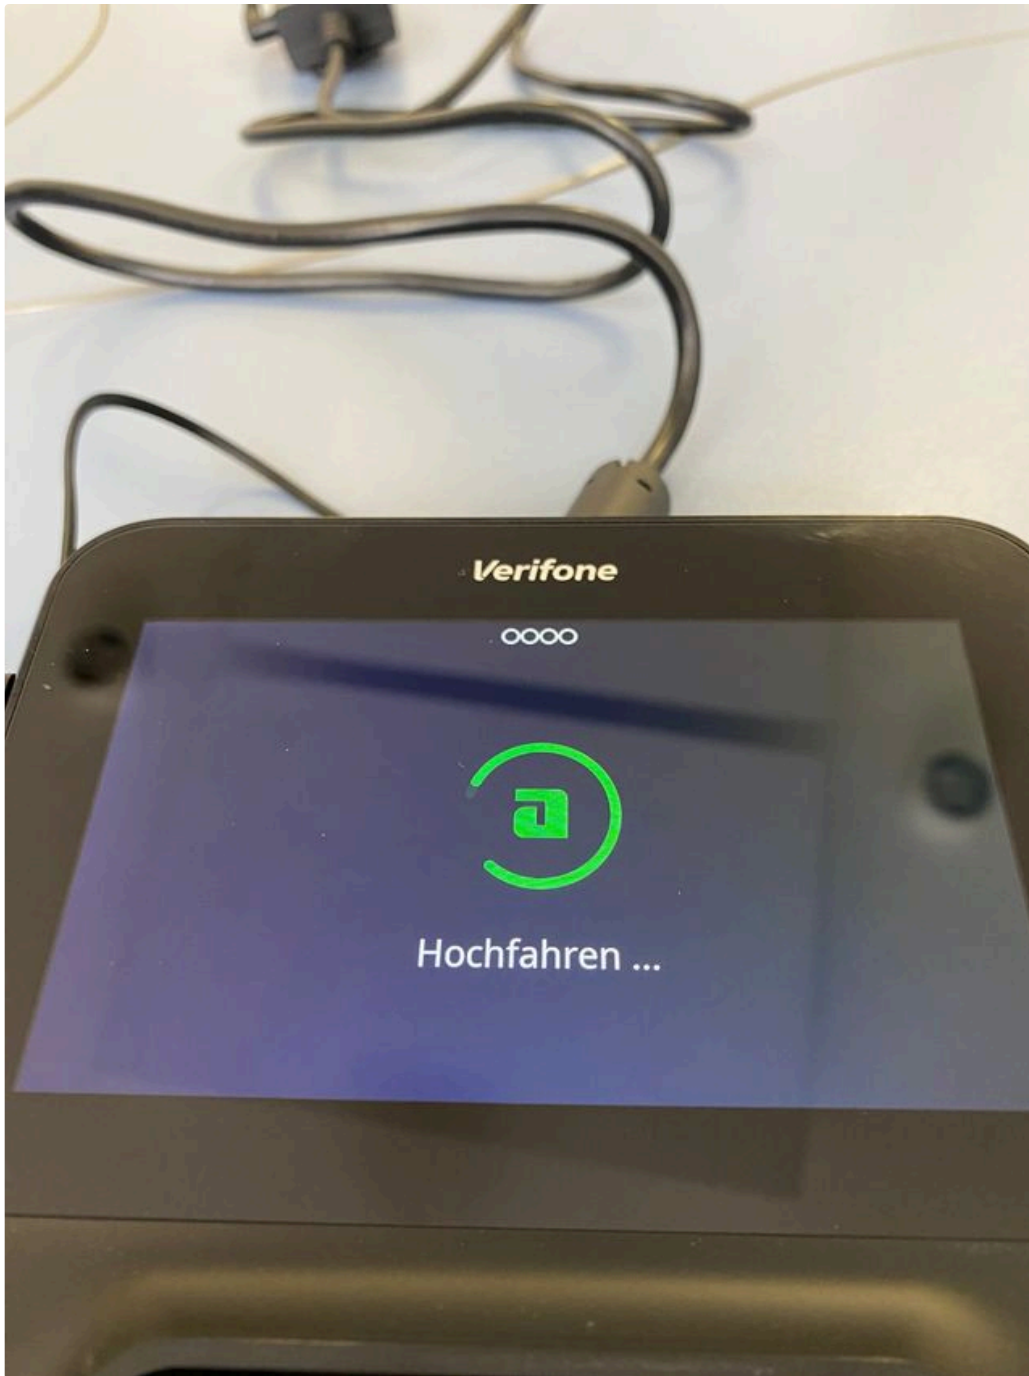

you will see the "SeekdaPay" screen



the last step is downloading the software update - this will take up to one hour - please be patient and do not disconnect the device from the power supply

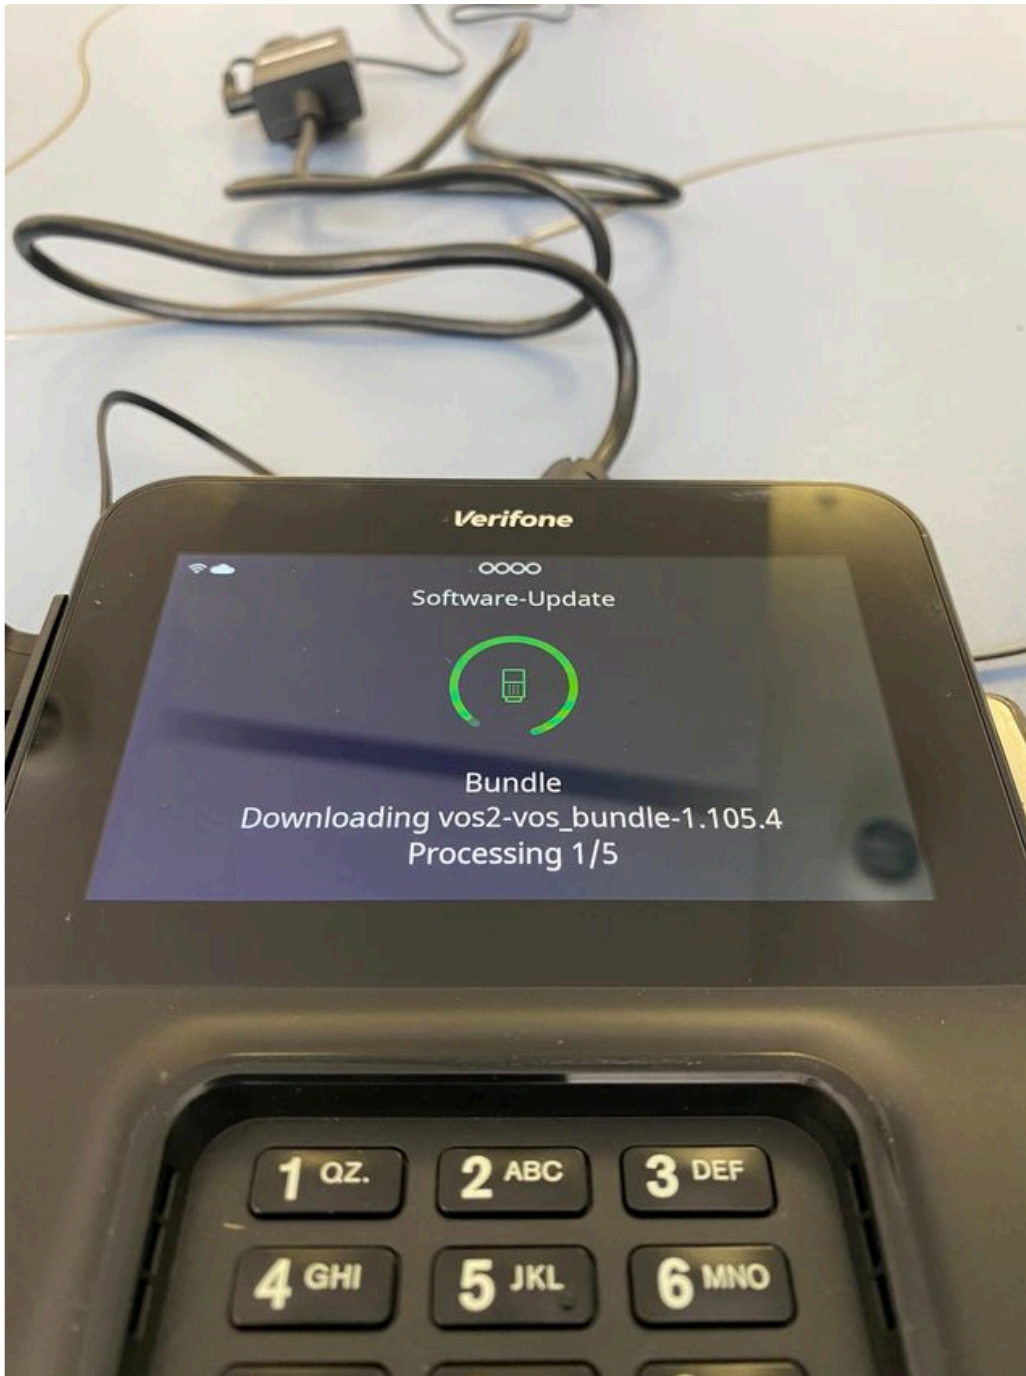

the device is ready as soon as you see the "SeekdaPay" screen again